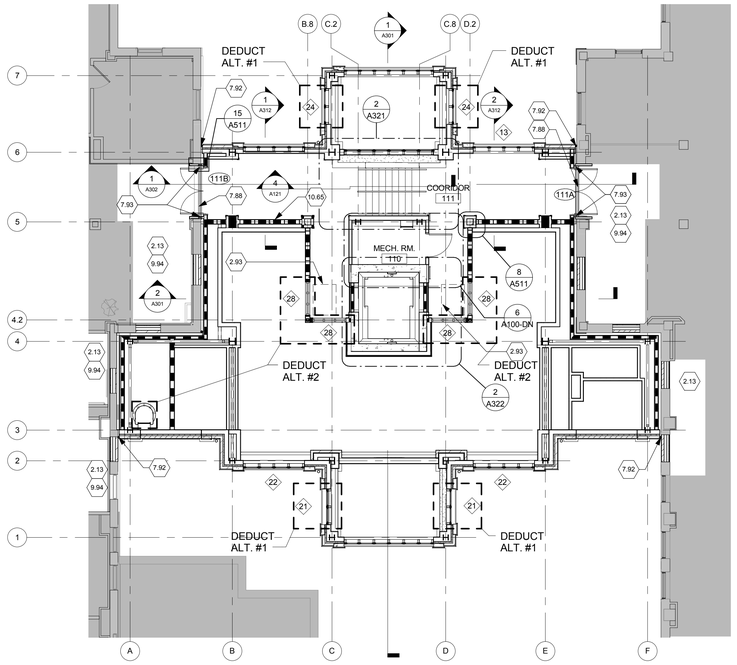

N 4 PLAN

LEVEL 1 - NOTE PLAN

Scale: 1/8" = 1'-0"

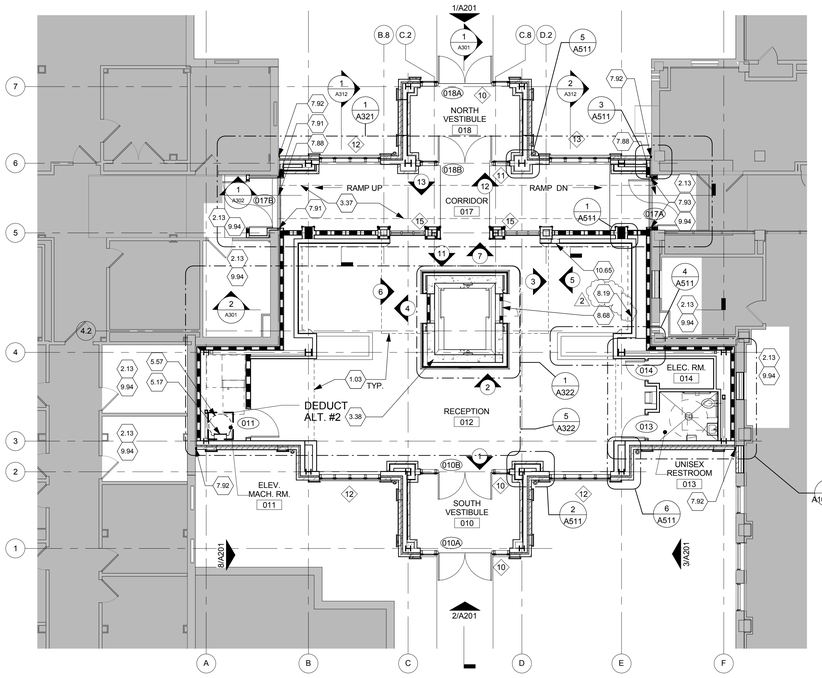

N 2 PLAN

BASEMENT- NOTE PLAN

Scale: 1/8" = 1'-0"



N 6 PLAN

ENLARGED PLAN

Scale: 1/4" = 1'-0"

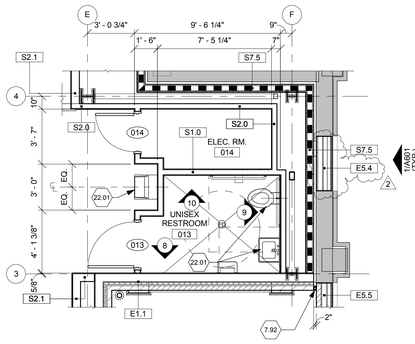

N 5 PLAN

ENLARGED PLAN

Scale: 1/4" = 1'-0"

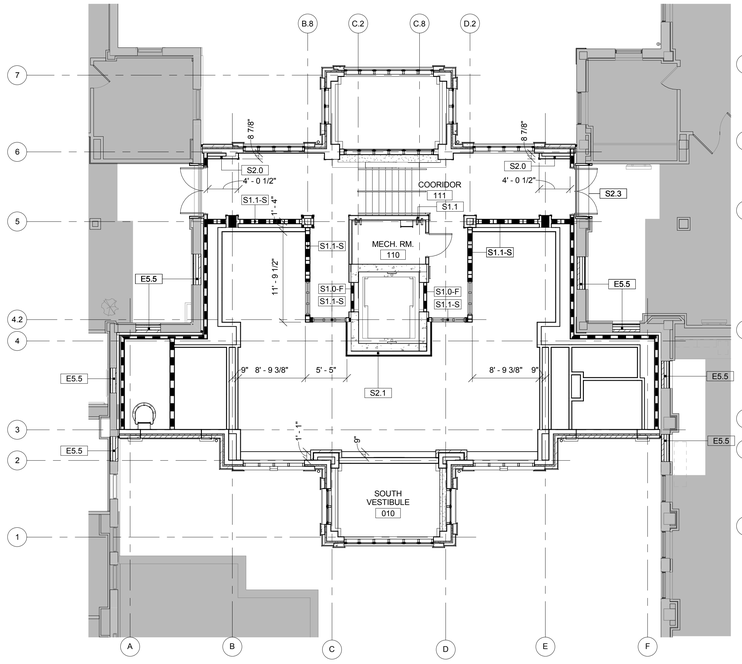

N 3 PLAN

LEVEL 1 - DIMENSION PLAN

Scale: 1/8" = 1'-0"

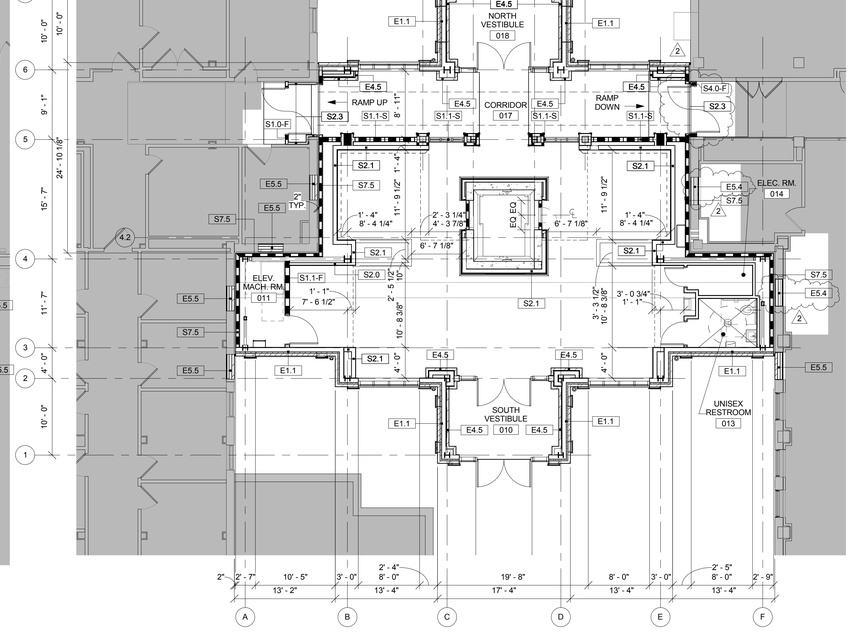

N 1 PLAN

BASEMENT - DIMENSION PLAN

Scale: 1/8" = 1'-0"

GRAPHIC SYMBOLS

- 1/A101 EXTERIOR ELEVATION
- X INTERIOR ELEVATION SEE 700 SERIES SHEETS
- X XXXX SIM SECTION/DETAIL NUMBER DRAWING NUMBER
- X EQUIPMENT TAG
- X COLUMN GRID
- X NOTE
- FD FLOOR DRAIN
- X WINDOW OPENING
- 101 DOOR OPENING
- X X ROOM NAME ROOM NUMBER
- XX.X-X WALL TYPE SEE SHEET A001
- 10'-8" CEILING HEIGHT
- x FINISH DESIGNATION
- HANDICAP TURN RADIUS

GENERAL NOTES

A All dimensions are taken to face of gypsum wallboard or unit masonry.
B Edge of all door jambs at hinge side not otherwise indicated are to be 6" from the face of intersecting walls.
C Install fire retardant blocking at all wall mounted equipment, accessories, casework and wall- mounted door stops. Provide certificate of fire-retardant to the C.O.R. for approval.
D All walls are type S1.0 unless noted otherwise. For partition types refer to Drawing A501.
E Verify all conditions in the field prior to fabrication, erection and construction.
F All gypsum board to be moisture resistant gypsum board behind all new sinks, drinking fountain, and water closet.
G Provide accoustic batt insultion at interior partitions and thermal batt insulation at all new exterior wall construction.
H Coordinate access to all phases of construction, deliveries, and debris removal with the C.O.R. See General Requirements.
J 100'-0" equals 703.15', contractor to verify floor to floor elevations in the field.
K All asbestos containing material (ACM) must be abated per the direction of the C.O.R. and project specification 028213 and local state and federal regulations. Abatement if required is to be scheduled in appropriate sequence with demolition, new construction and project phasing.
L Finish floor elevation is considered 0'-0" for floor drain placement. All drains shall be at -0'-0 1/2" unless noted otherwise. Slope slab to drain. See Structural Drawings.
M Cast stone arches will be self-supporting, Attachment will be designed by the cast stone manufacturer. See Structural Drawings.
N Tooth in all new masonry into existing, match all existing conditions.
P See General Conditions for full description of Deduct Alternates #1 & 2.
Q See sheet A401 for Interior Elevations.
R See sheet G100 for fire & smoke rated walls.

⬡ FLOOR PLAN NOTES

1.03 Line of bulkhead above, refer to Reflected Ceiling Plans.
2.13 Coordinate exact limits of construction and phasing in the field with the C.O.R.
2.93 Area of Rescue Assistance. See Electrical Drawings.
3.37 New concrete tunnel. Verify all elevations and enpoints in the field prior to beginning construction. See Structural Drawings
3.38 Elevator shaft. See Structural Drawings.
5.17 Fixed steel ladder with 1" diameter steel rungs @ 12" O.C. and steel safety cage. Height of safety cage to start 7'-2" A.F.F. Mount to wall and floor slab with steel angle brackets. Provide fire treated wood blocking per ladder manufacturer. Coordinate placement during wall construction. (DEDUCT ALT. #2)
5.51 Structural steel column with sprayed-on fireproofing. See Structural Drawings.
5.57 Coordinate location of electric panel with ladder safety cage. See Electrical Drawings.
7.88 2" aluminum continuous 2 hour rated floor to floor expansion joint cover with continuous recessed heavy duty centering plate to accept floor finish and dual thermoplastic gaskets.See Detail sheet. Typical in finished spaces.
7.91 2" aluminum continuous 1 hour wall to wall expansion joint cover. See detail plans.
7.92 Continuous 2" wall to wall exterior expansion joint cover with expandable seal.
7.93 2" aluminum continuous 1 hour wall to corner expansion joint cover.
8.19 New 3'-0" X 2'-6" access panel. Mount bottom 4'-6" A.F.F., but verify exact height in the field. Mount panel so that opening is centerd on reset for fire damper installed at this location. Verify installation with COR prior to installation. Paint to match wall to finish.
8.68 Provide 3'-0" x 2'-0" 1 hour fire rated stainless steel door in shaft infill. Provide security acess handle and rate doors to match shaft rating.
9.94 Match all existing finishes this area. Coordinate with Phasing Plans.
10.64 Continuous resilient handrail, see Finish Schedule.
10.65 New recessed fire exhinguisher cabinet with full vision panel.
22.01 Plumbing fixture. See Plumbing Drawings.



N Key Plan PROJECT
Scale: N.T.S.

FULLY SPRINKLERED

2	Addendum 2	06/03/2014
Revisions		Date

CONSULTANTS:

STATE OF OHIO · JOHN A. POE 6549 · REGISTERED ARCHITECT

ARCHITECT/ENGINEERS:

JOHN POE ARCHITECTS

116 EAST THIRD STREET
DAYTON, OHIO 45402-2130
937 461 3290 PHONE
937 461 0260 FAX
jpa@johnpoe.com

Drawing Title: DIMENSION / NOTE PLAN - BASEMENT & LEVEL 1

Approved: Project Director

Project Title: CLC Common Area Connector

Location: Chillicothe, Ohio

Date: April 28, 2014 | Checked: WS | Drawn: VR

Project No. VA Project No. 538-CSI-301 JPA Project No. 12019.00

Building Number: 210/211

Drawing Number: A100-DN Dwg.10 of 70

Office of Construction and Facilities Management

Department of Veterans Affairs



7 TYPICAL SOFFIT AT EXPANSION JT.

Scale: 1/2" = 1'-0"

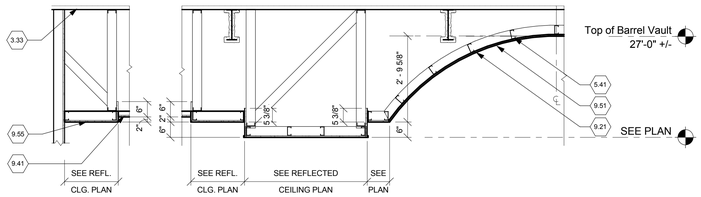

5 CEILING SOFFIT DETAIL

Scale: 1/2" = 1'-0"

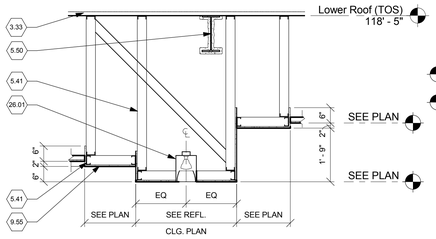

6 CEILING SOFFIT DETAIL

Scale: 1/2" = 1'-0"

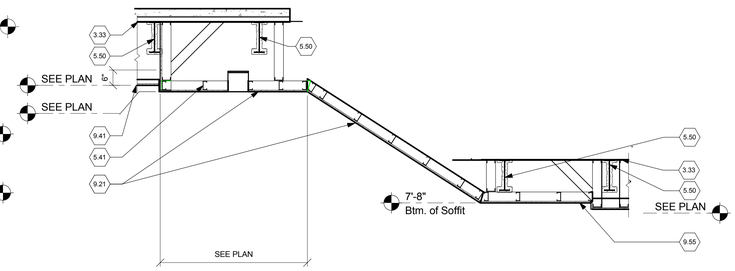

4 CEILING SOFFIT DETAIL

Scale: 1/2" = 1'-0"

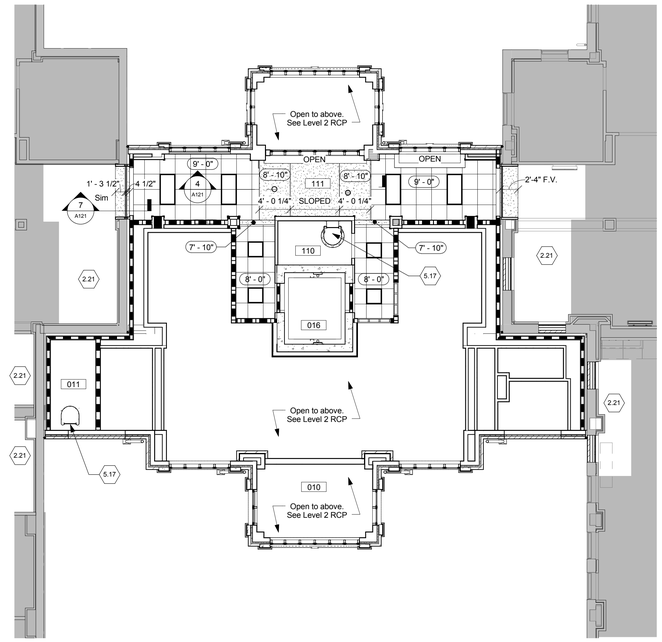

N 2 LEVEL 1 - REFLECTED CEILING PLAN

PLAN

Scale: 1/8" = 1'-0"

GENERAL NOTES

A. All wood blocking shall be fire retardant.
B. Light fixtures, sprinkler heads, speakers, and HVAC devices shall be located as close as possible to the center of acoustical ceiling panels. Confirm any deviation from this with the Project Engineer.
C. See P, M, E and FP drawings for additional information regarding final information and quantites of fixtures/devices to be installed in ceiling.
D. See Electrical Drawings for lighting specifications.
E. All gypsum board ceilings to be painted P-7 unless noted otherwise.
F. Ceiling height to be 8'-0" AFF, unless noted otherwise.
G. All suspended acoustical ceilings are to be type ACT-1 unless noted otherwise.
H. See General Conditions for full description of Deduct Alternates #1 & 2.

⬡ REFLECTED CEILING PLAN NOTES

2.02 Existing structure to remain.
2.21 Remove existing ceiling 8 foot into existing space. Return ceiling tiles to the owner. Provide new ceiling tiles at the conclusion of construction. Verify the condition of the existing ceiling grid with the C.O.R. prior to beginning construction.
2.22 Remove portion of existing ceiling to create new soffit.
3.33 5 1/4" thick 2 hour rated composite concrete deck UL #D916. See Structural Drawings.
5.17 Fixed steel ladder with 1" diameter steel rungs @ 12" O.C. and steel safety cage. Height of safety cage to start 7'-2" A.F.F. Mount to wall and floor slab with steel angle brackets. Provide fire treated wood blocking per ladder manufacturer. Coordinate placement during wall construction. (DEDUCT ALT. #2)
5.41 3 5/8" metal stud framing.
5.50 Structural steel beam with sprayed on fireproofing. See Structural Drawings.
7.88 2" aluminum continuous 2 hour rated floor to floor expansion joint cover with continuous recessed heavy duty centering plate to accept floor finish and dual thermoplastic gaskets.See Detail sheet. Typical in finished spaces.
7.89 2" aluminum continuous ceiling to wall expansion joint cover.
7.90 2" aluminum continuous ceiling to ceiling expansion joint system with continuous aluminum frame and seal.
8.37 Roof hatch.
9.21 5/8" Type X gypsum board. See wall types.
9.41 Suspended acoustic ceiling tile/grid. See Room Finish Schedule.
9.50 Ceiling varies. Refer to building sections and ceiling details.
9.51 Intention is for top of barrel vault to follow radius of window. If there are any questions contact the C.O.R.
9.55 Two layers of 5/8" type X gyp. board. joints are staggered.
26.01 Light fixture. See Electrical Drawings.

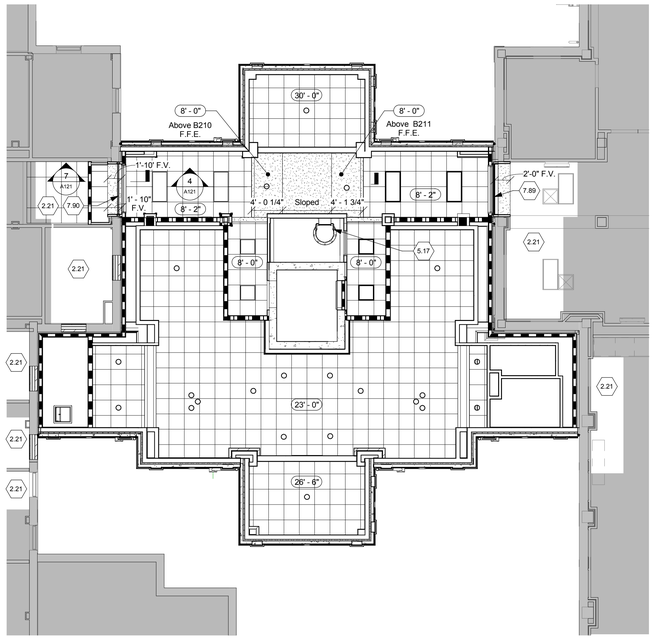

N 8 LEVEL 2 - REFLECTED CEILING PLAN (DEDUCT ALT. #1)

PLAN

Scale: 1/8" = 1'-0"

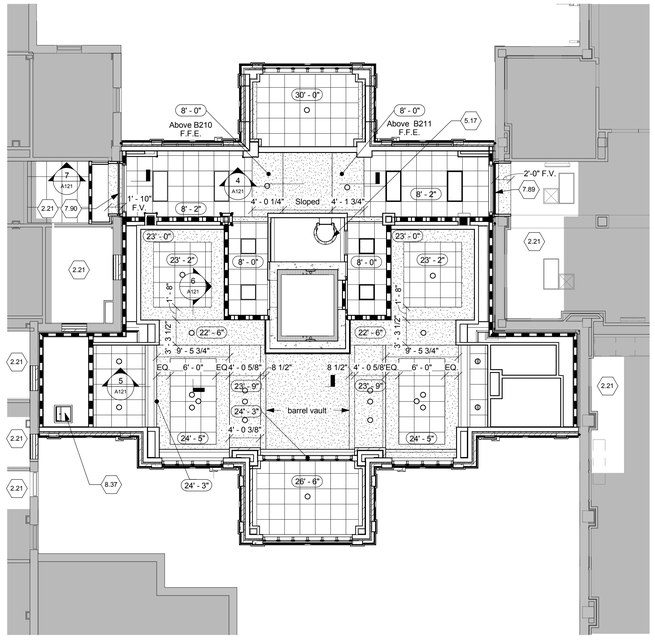

N 3 LEVEL 2 - REFLECTED CEILING PLAN

PLAN

Scale: 1/8" = 1'-0"

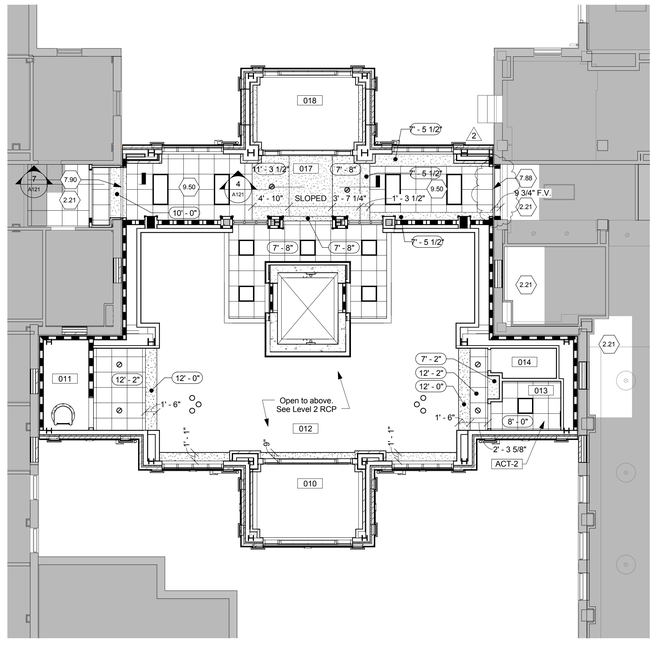

N 1 BASEMENT - REFLECTED CEILING PLAN

PLAN

Scale: 1/8" = 1'-0"

REFLECTED CEILING PLAN LEGEND

- Recessed downlight fixture
- 2' x 4' fluorescent fixture
- 2' x 2' acoustical tile ceiling
- Gypsum board / portland cement plaster ceiling / soffit - painted
- Pendant light fixture
- Surface-mounted strip light fixture
- Supply Air Diffuser
- Return Air Grille
- Chain-hung light fixture
- Access panel
- Recessed wall-wash fixture



N Key Plan

PROJECT

Scale: N.T.S.

FULLY SPRINKLERED

2	Addendum 2	06/03/2014
Revisions		Date

CONSULTANTS:

STATE OF OHIO
JOHN A. POE 6549
REGISTERED ARCHITECT

ARCHITECT/ENGINEERS:

JOHN POE ARCHITECTS

116 EAST THIRD STREET
DAYTON, OHIO 45402-2130
937 461 3290 PHONE
937 461 0260 FAX
jpa@johnpoe.com

Drawing Title: REFLECTED CEILING PLAN

Approved: Project Director

Project Title: CLC Common Area Connector

Location: Chillicothe, Ohio

Date: April 28, 2014

Checked: WS

Drawn: VR

Project No.
VA Project No. 538-CSI-301
JPA Project No. 12019.00

Building Number: 210/211

Drawing Number: A121

Dwg.13 of 70

Office of Construction and Facilities Management

Department of Veterans Affairs

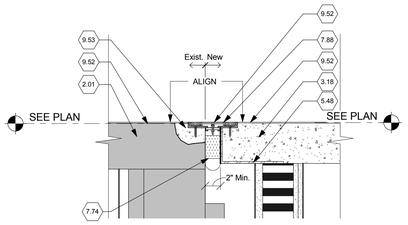

7 EXPANSION JOINT DETAIL

Scale: 1 1/2" = 1'-0"



6 TYPICAL HANDRAIL DETAIL

Scale: 1 1/2" = 1'-0"



5 STRINGER DETAIL

Scale: 1 1/2" = 1'-0"

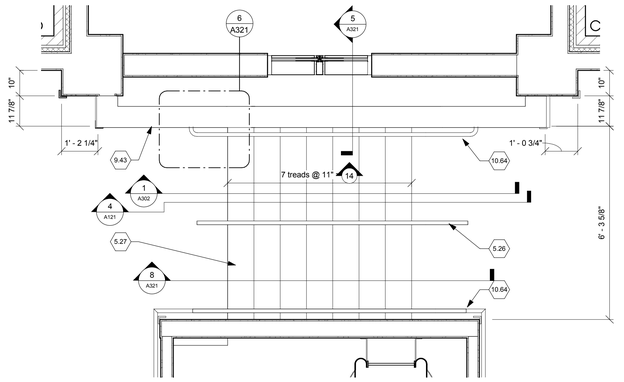

3 Enlarged Stair Plan Level 2

Scale: 1/2" = 1'-0"

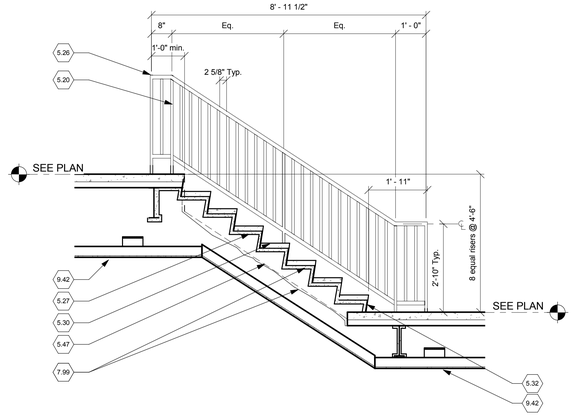

8 MID STAIR SECTION FLR. 1 & 2

Scale: 1/2" = 1'-0"

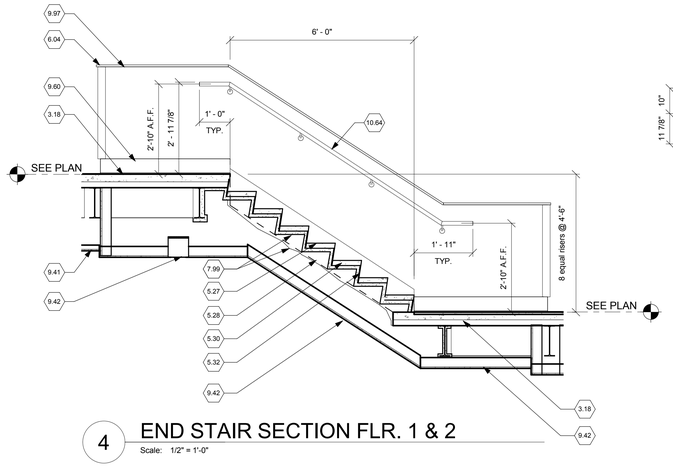

4 END STAIR SECTION FLR. 1 & 2

Scale: 1/2" = 1'-0"

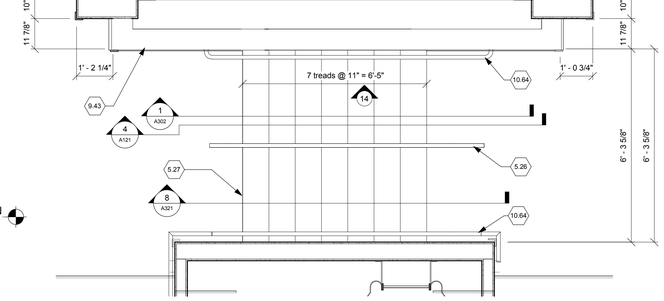

2 Enlarged Stair Plan Level 1

Scale: 1/2" = 1'-0"

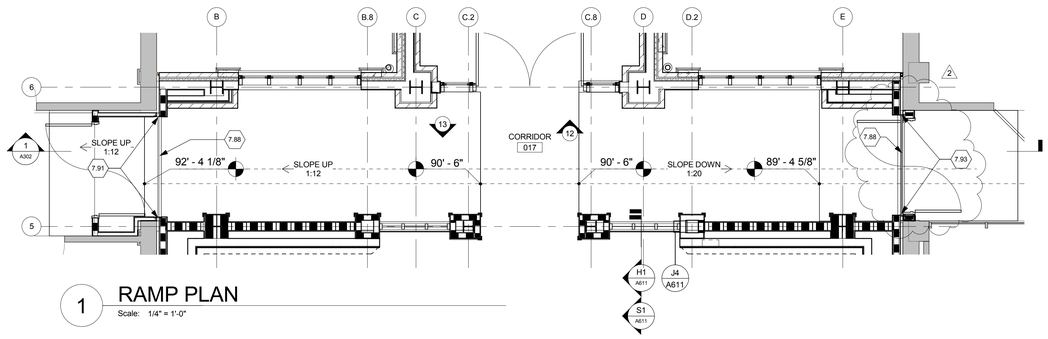

1 RAMP PLAN

Scale: 1/4" = 1'-0"

SECTION GENERAL NOTES

A. All wood blocking / framing shall be fire retardant U.N.O.
B. Paint all exterior wood surfaces Pure White, Sherwin Williams, SW 7005 or an approved equal.
C. New brick veneer shall align with existing and match all existing conditions.
D. Verify all conditions prior to fabrication, erection and installation.
E. All cast stone attachments will be per the cast stone manufacturer.
F. Structural reinforcement at door / window curtainwall openings will be determined by the curtain wall manufacturer.
G. See General Conditions for full description of Deduct Alternates #1 & 2.

⬡ STAIR DETAIL NOTES

2.01 Existing construction to remain.
3.18 Composite concrete deck 2 hour rated U.L. # D916. See Structural Drawings.
5.20 3/4" square steel pickets @ 4" o.c., factory prime.Paint to match resilient H.R.
5.26 1 1/2" I.D. steel pipe handrail/guardrail. Grind all joints smooth and factory prime. Paint to match resilient H.R.
5.27 Steel stair with concrete-filled steel pan treads and steel plate risers. Assembly shall include integral handrails and pipe column supports.
5.28 Steel stringer by stair manufacturer.
5.30 Steel pan tread with 3000 psi concrete fill.
5.32 Closed steel riser.
5.47 Mid-span steel stringer by stair manufacturer.
5.48 Continuous bent plate / pour stop. See Structural Drawings.
6.04 Solid surface cap installed @ top of wall. Countersink screws and plug holes with same material.
7.74 Manufacturer's integral vapor barrier and fire-stop system rated the same as the expansion joint assembly.
7.88 2" aluminum continuous 2 hour rated floor to floor expansion joint cover with continuous recessed heavy duty centering plate to accept floor finish and dual thermoplastic gaskets.See Detail sheet. Typical in finished spaces.
7.91 2" aluminum continuous 1 hour wall to wall expansion joint cover. See detail plans.
7.93 2" aluminum continuous 1 hour wall to corner expansion joint cover.
7.99 2 hour rated sprayed-on fireproofing applied to the bottom of steel stair assembly and stringers
9.41 Suspended acoustic ceiling tile/grid. See Room Finish Schedule.
9.42 5/8" Type 'X" gypsum board soffit.
9.43 Gypsum wall partition as scheduled.
9.49 'Z' reveal moulding typical at all drywall steel finish boundaries.
9.52 Finish floor. See Finish Plans
9.53 Concerete floor infill at existing slab by General Contractor.
9.55 Two layers of 5/8" type X gyp. board. joints are staggered.
9.60 Resilient base. See Room Finish Schedule.
9.97 Top of wall protection. Coordinate placement in field.
10.64 Continuous resilient handrail, see Finish Schedule.

FULLY SPRINKLERED

Revisions		Date
2	Addendum 2	06/03/2014

CONSULTANTS:

STATE OF OHIO
JOHN A. POE 6549
REGISTERED ARCHITECT

ARCHITECT/ENGINEERS:

JOHN POE ARCHITECTS

116 EAST THIRD STREET
DAYTON, OHIO 45402-2139
937 461 3290 PHONE
937 461 0260 FAX
jpa@johnpoe.com

Drawing Title: STAIR & RAMP SECTIONS / DETAILS

Approved: Project Director

Project Title: CLC Common Area Connector

Location: Chillicothe, Ohio

Date: April 28, 2014 | Checked: WS | Drawn: MA/VR

Project No.: VA Project No. 538-CSI-301; JPA Project No. 12019.00

Building Number: 210/211

Drawing Number: A321

Dwg.19 of 70

Office of Construction and Facilities Management

Department of Veterans Affairs



2 KEYSTONE SECTION
Scale: 1 1/2" = 1'-0"



1 KEYSTONE ELEVATION
Scale: 1 1/2" = 1'-0"

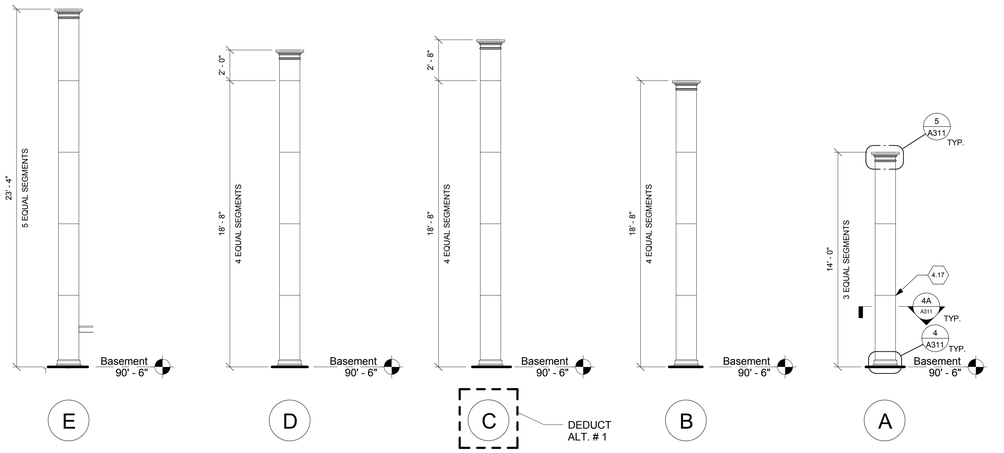

PILASTER TYPES
Scale: 1/4" = 1'-0"

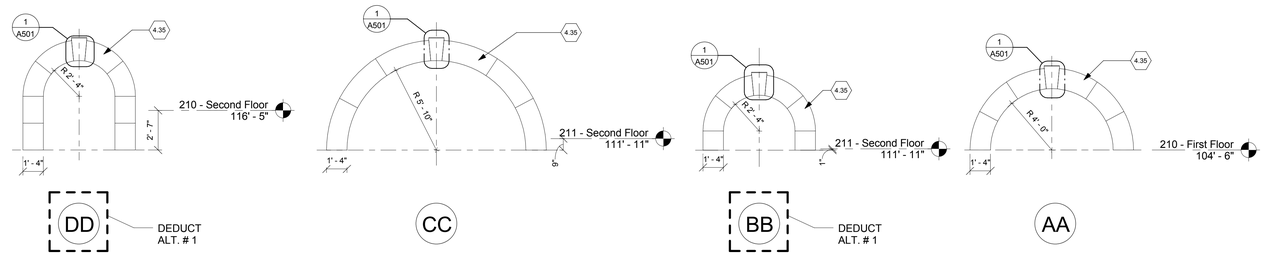

ARCH TYPES
Scale: 1/4" = 1'-0"

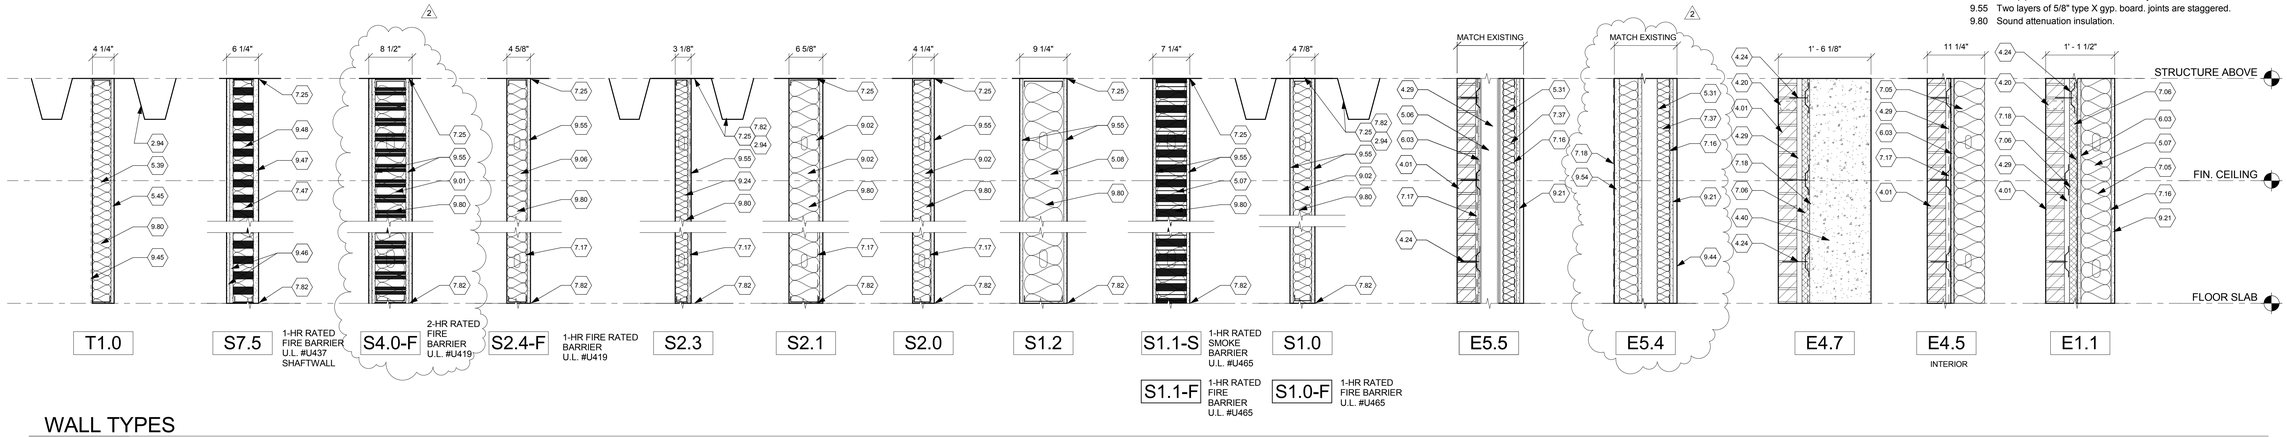

WALL TYPES
Scale: 1" = 1'-0"

GENERAL NOTES

A All dimensions are taken to face of gypsum wallboard or unit masonry.
B Edge of all door jambs at hinge side not otherwise indicated are to be 6" from the face of intersecting walls.
C Install fire retardant blocking at all wall mounted equipment, accessories, casework and wall- mounted door stops. Provide certificate of fire-retardant to the C.O.R. for approval.
D All walls are type S1.0 unless noted otherwise. For partition types refer to Drawing A501.
E Verify all conditions in the field prior to fabrication, erection and construction.
F All gypsum board to be moisture resistant gypsum board behind all new sinks, drinking fountain, and water closet.
G Provide accoustic batt insultion at interior partitions and thermal batt insulation at all new exterior wall construction.
H Coordinate access to all phases of construction, deliveries, and debris removal with the C.O.R. See General Requirements.
J 100'-0" equals 703.15', contractor to verify floor to floor elevations in the field.
K All asbestos containing material (ACM) must be abated per the direction of the C.O.R. and project specification 028213 and local state and federal regulations. Abatement if required is to be scheduled in appropriate sequence with demolition, new construction and project phasing.
L Finish floor elevation is considered 0'-0" for floor drain placement. All drains shall be at -0'-0 1/2" unless noted otherwise. Slope slab to drain. See Structural Drawings.
M Cast stone arches will be self-supporting, Attachment will be designed by the cast stone manufacturer. See Structural Drawings.
N Tooth in all new masonry into existing, match all existing conditions.
P See General Conditions for full description of Deduct Alternates #1 & 2.
Q See sheet A401 for Interior Elevations.
R See sheet G100 for fire & smoke rated walls.

⬡ WALL TYPE NOTES

2.94 Existing concrete pan & joist.
4.01 Brick veneer to match all existing conditions.
4.17 Cast stone pilaster, refer to cast stone details.
4.20 Masonry vent 24" o.c. top & bottom of wall typical.
4.24 Adjustable masonry veneer anchors @ 16" o.c. vertical, 24" O.C. horizontal.
4.29 Airspace.
4.35 Self supporting cast stone arch with keystone. Cast stone manufacturer to provide laterial tie embeds. See Structural Drawings.
4.40 Reinforced concrete wall. See Structural Drawings.
5.06 3-5/8" cold formed metal framing @ 16" O.C. See Structural Drawings.
5.07 6" cold formed metal framing @ 16" O.C. See Structural Drawings.
5.08 8" cold formed metal framintg @ 16" O.C. See Structural Drawings.
5.31 2 1/2" 20 GA metal stud framing @ 16" o.c..
5.39 3 5/8" 20 GA metal studs @16" o.c.
5.45 5/8" type "X" gypsum board, or 5/8" exterior sheathing. See Phasing Plan.
6.03 5/8" exterior gypsum board sheathing.
7.05 6" batt insulation, R-21 min.
7.06 1 1/2" rigid insulation, R= 7.5 min.
7.16 Vapor barrier. Seal all joints and penetratons.
7.17 Air and moisture barrier. Lap air and moisture barrier over thru-wall flashing.
7.18 Air and moisture barrier.
7.25 Firesafing / firestopping in flute voids. See detail 11/A511.
7.37 Fiberglass batt insulation.
7.47 Fire-resistant insulation. R=11
7.82 Continuous acoustic sealant @ non-rated walls / fire-rated sealant @ rated walls each side.
9.01 1 5/8" non-structural metal framing @ 16" o.c.
9.02 3 5/8" non-structural metal framing @ 16" o.c.
9.06 4" non-structural metal framing @ 16" o.c.
9.21 5/8" Type X gypsum board. See wall types.
9.24 2 1/2" steel stud.
9.44 3/4" plaster finish to match existing adjacent wall.
9.45 Flame-retardant plastic sheeting sealed to create negative air pressure inside work zone.
9.46 5/8" Type "X" gypsum board.
9.47 1" Type "X" gypsum shaft board.
9.48 4" metal C-H stud @ 24" o.c.
9.54 Two (2) hour rated shaftwall assembly.
9.55 Two layers of 5/8" type X gyp. board. joints are staggered.
9.80 Sound attenuation insulation.

FULLY SPRINKLERED

2	Addendum 2	06/03/2014
Revisions		Date

CONSULTANTS:

STATE OF OHIO · JOHN A. POE 6549 · REGISTERED ARCHITECT

ARCHITECT/ENGINEERS:
JOHN POE ARCHITECTS
116 EAST THIRD STREET
DAYTON, OHIO 45402-2139
937 461 3290 PHONE
937 461 0260 FAX
jpa@johnpoe.com

Drawing Title: WALL TYPES
Approved: Project Director

Project Title: CLC Common Area Connector
Location: Chillicothe, Ohio
Date: April 28, 2014
Checked: WS
Drawn: VR

Project No.
VA Project No. 538-CSI-301
JPA Project No. 12019.00
Building Number: 210/211
Drawing Number: A501
Dwg.22 of 70

Office of Construction and Facilities Management
Department of Veterans Affairs

DOOR SCHEDULE															
DOOR #	BETWEEN		DOOR DESCRIPTION						FRAME DESCRIPTION				FIRE RATING	HDWE SET	REMARKS
	RM	RM	TYPE	MAT'L	SIZE #	W	H	T	TYPE	MAT'L	HEAD	JAMB			
010A	EXT	010	FG	ALUM	2	3' - 6"	7' - 0"	1 1/2"	MFR	ALUM	H2	J5		002	See Aluminum Curtainwall Elevations / Details.
010B	010	012	FG	ALUM	2	3' - 6"	7' - 0"	1 1/2"	MFR	ALUM	H2	J5		001	See Aluminum Curtainwall Elevations / Details.
011	011	012	F	WD	1	3' - 8"	7' - 0"	1 3/4"	1	HM	H1	J1		003	
013	012	013	F	WD	1	3' - 0"	7' - 0"	1 3/4"	1	HM	H1	J1	2	005	3/4" undercut @ restroom
014	012	014	F	WD	1	2' - 6"	7' - 0"	1 3/4"	1	HM	H1	J1		004	
017A	017	BLDG 211	N	WD	2	3' - 0"	7' - 0"	1 3/4"	2	HM	H1	J1	2HR	007	
017B	BLDG 210	BLDG 210	N	WD	2	3' - 0"	7' - 0"	1 3/4"	2	HM	H1	J1	1HR	007	
018A	018	EXT	FG	ALUM	2	3' - 6"	7' - 0"	1 1/2"	MFR	ALUM	H2	J5		002	See Aluminum Curtainwall Elevations / Details.
018B	017	018	FG	ALUM	2	3' - 6"	7' - 0"	1 1/2"	MFR	ALUM	H2	J5		001	See Aluminum Curtainwall Elevations / Details.
111A	BLDG 211	111	N	WD	2	3' - 0"	7' - 0"	1 3/4"	1	HM	H1	J1	1HR	007	
111B	111	BLDG 210	N	WD	2	3' - 0"	7' - 0"	1 3/4"	1	HM	H1	J1	1HR	007	
116E	110	111	F	WD	1	3' - 0"	7' - 0"	1 3/4"	1	HM	H1	J1	1HR	006	
116H	BLDG 211	017						0"							
211A		211	N	WD	2	3' - 0"	7' - 0"	1 3/4"	1	HM	H1	J1	1HR	007	
211B	211	BLDG 210	N	WD	2	3' - 0"	7' - 0"	1 3/4"	1	HM	H1	J1	1HR	007	



FG F

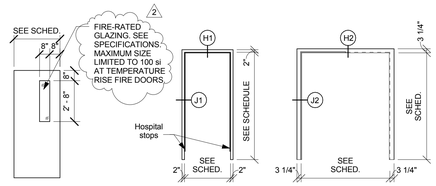

N 1 2

DOOR TYPES

Scale: 1/4" = 1'-0"

FRAME TYPES

Scale: 1/4" = 1'-0"

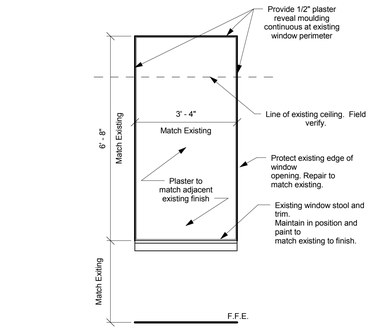

ELEVATION



PLAN

1 TYP. WINDOW INTERIOR INFILL FINISH

Scale: 1/2" = 1'-0"

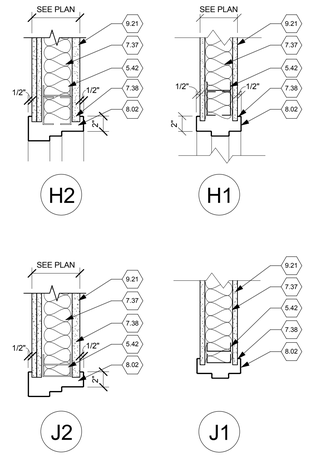

DOOR DETAILS

Scale: 1 1/2" = 1'-0"

GENERAL DOORS NOTES

A. All wood blocking shall be fire retardant, u.n.o..
B. See Finish Plans for typical sill conditions at unlike floor finishes.
C. Seal joints between finish material and bottom of door frames.
D. Paint window frames at door windows to match door frame.
E. Double studs at all door openings.
F. Verify all conditions prior to fabrication, erection and installation.
G. Finish all exterior doors to match existing.
H. Refinish all existing doors to like new. Remove all existing hardware, unmount door, prep, prime and finish to match all existing conditions. Reinstall door and hardware, match all existing conditions.
J. Structural reinforcement at door / window curtainwall openings will be determined and designed by the curtain wall manufacturer.
K. See General Conditions for full description of Deduct Alternates #1 & 2.

○ DETAIL NOTES

5.42 Metal stud framing. See Wall Types.
7.37 Fiberglass batt insulation.
7.38 Sealant both sides of frame. Provide backer rod at all exterior locations.
8.02 Hollow metal frame.
9.21 5/8" Type X gypsum board. See wall types.

FULLY SPRINKLERED

Revisions		Date
2	Addendum 2	06/03/2014

CONSULTANTS:

STATE OF OHIO · JOHN A. POE 6549 · REGISTERED ARCHITECT

ARCHITECT/ENGINEERS:

JOHN POE ARCHITECTS

116 EAST THIRD STREET
DAYTON, OHIO 45402-2130
937 461 3290 PHONE
937 461 0260 FAX
jpa@johnpoe.com

Drawing Title: DOOR SCHEDULE & DETAILS

Approved: Project Director

Project Title: CLC Common Area Connector

Location: Chillicothe, Ohio

Date: April 28, 2014 | Checked: WS | Drawn: VR

Project No. VA Project No. 538-CSI-301 JPA Project No. 12019.00

Building Number: 210/211

Drawing Number: A601 Dwg.24 of 70

Office of Construction and Facilities Management

Department of Veterans Affairs

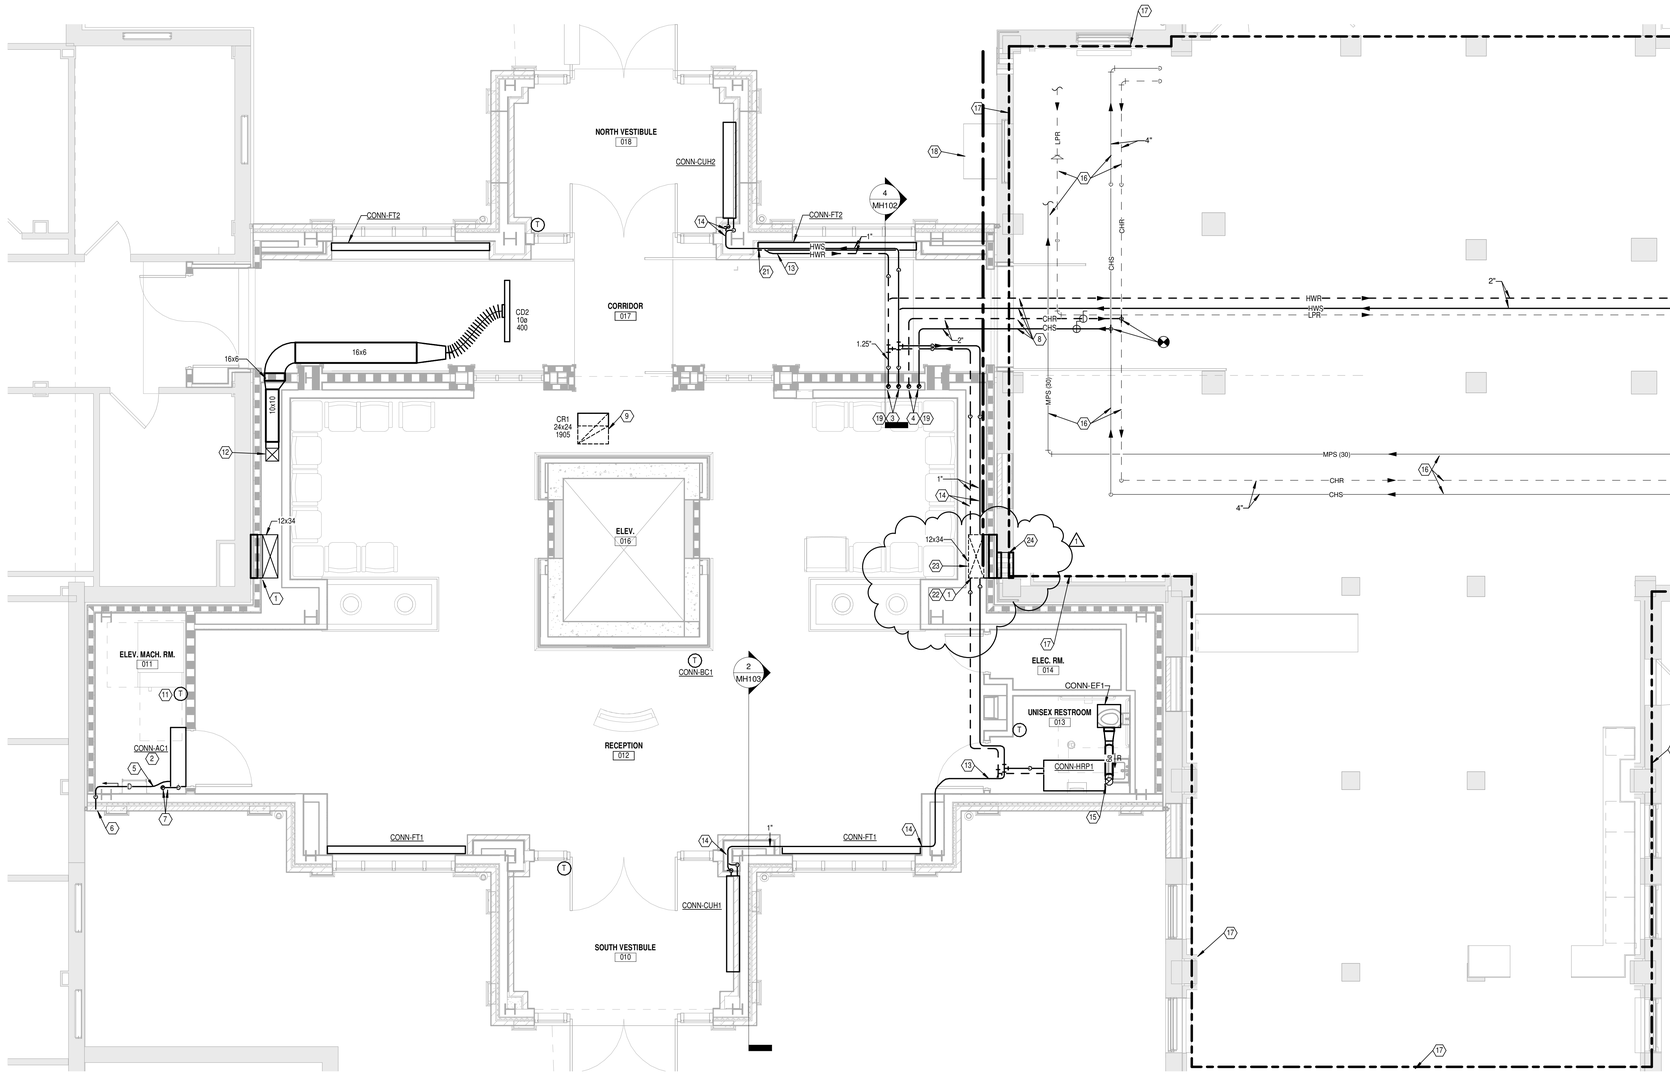

N 1 PLAN

BASEMENT FLOOR PLAN - NEW WORK

Scale: 1/4" = 1'-0"



N 2 PLAN

BASEMENT FLOOR PLAN - REMOVALS

Scale: 1/8" = 1'-0"

GENERAL NOTES

A REFER TO SHEET M001 FOR LEGEND, ABBREVIATIONS AND ADDITIONAL GENERAL NOTES.

NOTES

1 PROVIDE TRANSITION ELBOW SO THAT OPEN END OF DUCT COVERS EXISTING EXTERIOR WALL BRICK VENT OPENING. (APPROX. 24"X24" EXISTING OPENING). SEAL DUCT TO EXISTING FACE BRICK TO ENSURE AIRTIGHT AND WATERTIGHT SEAL. REFER TO SHEET MH102 FOR CONTINUATION ABOVE.

2 MOUNT INDOOR UNIT ON WALL ABOVE DOOR. COORDINATE EXACT MOUNTING HEIGHT WITH OTHER TRADES AND FIELD CONDITIONS.

3 HEATING HOT WATER SUPPLY AND RETURN PIPES- 2" FROM PIPE TUNNEL, UP TO FIRST FLOOR. REFER TO SHEET MH102 FOR CONTINUATION.

4 CHILLED WATER SUPPLY AND RETURN PIPES- 2" FROM PIPE TUNNEL, UP TO FIRST FLOOR. REFER TO SHEET MH102 FOR CONTINUATION.

5 COOLING COIL CONDENSATE DRAIN PIPE FULL SIZE OF DX FAN COIL UNIT DRAIN OUTLET (APPROX. 0.75"). PITCH PIPE DOWN IN DIRECTION OF FLOW AND PROVIDE CLEANOUT AT EVERY CHANGE IN DIRECTION.

6 ROUTE CONDENSATE DRAIN PIPE DOWN INSIDE WALL CAVITY ON WARM SIDE OF INSULATION, AND STUB THROUGH EXTERIOR WALL APPROX. 2'-0" ABOVE GRADE.

7 REFRIGERANT LIQUID AND SUCTION LINES UP TO CONN-CU1 ON ROOF ABOVE. REFER TO SHEET MH102 FOR CONTINUATION.

8 ROUTE PIPES THROUGH NEW OPENING IN EXISTING FOUNDATION WALL INTO NEW CONNECTOR PIPE TUNNEL. COORDINATE WITH ARCHITECTURAL AND STRUCTURAL DRAWINGS.

9 RETURN DUCT UP TO FIRST FLOOR ABOVE. REFER TO MECH ROOM ON SHEET MH102 FOR CONTINUATION.

10 REMOVE EXISTING SIDEWALL EXHAUST FAN AND ASSOCIATED WIRING, SUPPORTS, ACCESSORIES, ETC.

11 WALL MOUNTED THERMOSTAT ASSOCIATED WITH SPLIT SYSTEM BY SPLIT SYSTEM MANUFACTURER.

12 10"X10" SUPPLY DUCT DOWN FROM ABOVE. REFER TO SHEET MH102 FOR CONTINUATION.

13 PROVIDE CONTROL VALVE AND OTHER REQUIRED PIPING SPECIALTIES FOR CONN-CUH ABOVE LAY-IN CEILING AT THIS APPROXIMATE LOCATION. REFER TO PIPING DETAIL ON SHEET MH502.

14 RUN PIPING CONCEALED IN BUILDING CONSTRUCTION. COORDINATE WITH ARCHITECTURAL DRAWINGS.

15 6" DIAMETER EXHAUST DUCT UP THRU ROOF. REFER TO SHEET MH102 FOR CONTINUATION.

16 EXISTING PIPING TO REMAIN.

17 PLAN REGION INDICATED BY POLYLINE SHOWS PIPE BASEMENT LEVEL. EVERYTHING ELSE ON THIS SHEET SHOWS GROUND FLOOR LEVEL.

18 EXISTING AHU OUTSIDE AIR INTAKE HOOD FOR EXISTING AHU TO REMAIN. PROTECT IN PLACE DURING CONSTRUCTION ACTIVITIES AND COVER OPENING WITH TEMPORARY FILTER MATERIAL TO MINIMIZE INTAKE OF DUST.

19 ROUTE INSULATED PIPES THROUGH SLEEVES PROVIDED BY OTHERS IN GRADE BEAM.

20 REMOVE EXISTING HOT WATER CABINET CONVECTOR AND ASSOCIATED PIPING, CONTROLS, ETC.

21 OFFSET PIPE AND RUN STACKED INSIDE COLUMN FUR-OUT.

22 TO ACCOMODATE FIRE DAMPER ACCESS, OMIT TURNING VANES FROM THIS MITERED ELBOW.

23 PROVIDE 24" x 24" DUCT ACCESS PANEL. COORDINATE PLACEMENT WITH 36" x 30" WALL ACCESS PANEL PROVIDED BY OTHERS, TO ENSURE FIRE DAMPER IS EASILY ACCESSIBLE.

24 REMOVE ALL BRICKS INSIDE OF PERIMETER OF EXISTING BRICK VENT TO FORM SINGLE OPENING (APPROX. 20" x 20"). PROVIDE TYPE "A" STATIC FIRE DAMPER WITHIN OPENING, INSTALL PER MANUFACTURER'S INSTRUCTIONS. FIELD VERIFY EXACT DIMENSION OF OPENING.

FULLY SPRINKLERED

Revisions		Date
1	ADDENDUM 2	06/03/2014

6/3/2014 9:22:43 AM

CONSULTANTS:

Heapy Engineering
MEP Design Technology Planning Commissioning Energy
Nationally Recognized Leader in Sustainability
1400 W Dorothy Lane, Dayton, OH 45409-1310
Ph 937-224-0861 Fax 937-224-5777 www.heapy.com
PROJECT NO.: 2012-04016 FIRM LICENSE NO.: 01528

STATE OF OHIO · GARY S. EDDICE · E-52755 · REGISTERED PROFESSIONAL ENGINEER

ARCHITECT/ENGINEERS:

JOHN POE ARCHITECTS
116 EAST THIRD STREET
DAYTON, OHIO 45402-2130
937 461 3290 PHONE
937 461 0260 FAX
jpa@johnpoe.com

Drawing Title: BASEMENT FLOOR PLAN - REMOVALS AND NEW WORK

Approved: Project Director

Project Title: CLC Common Area Connector

Location: Chillicothe, Ohio

Date: APRIL 28, 2014 | Checked: JAC | Drawn: TEG

Project No.
VA Project No. 538-CSI-301
JPA Project No. 12019.00

Building Number: 210/211

Drawing Number: MH101

Dwg. 50 of 70

Office of Construction and Facilities Management
Department of Veterans Affairs